

MD-63 PROFIBUS-DP

Point-to-point, fibre




- ⌘ Developed for PROFIBUS
- ⌘ Autobauding
- ⌘ Galvanic isolation
- ⌘ ST-connectors
- ⌘ SC-connectors (820 nm), multimode
- ⌘ Multimode or singlemode cable
- ⌘ Transmission distance up to 25 km (15.53 mi)
- ⌘ Bus connection on D-sub or screw terminal
- ⌘ AC-/DC-supply
- ⌘ Reliable performance and function
- ⌘ Withstands environments exposed to high levels of interference

Field of application

The Westermo PROFIBUS range consists of numerous products. MD-63 PROFIBUS is used for point-to-point communication. The 9-pos. D-sub is designed to the Profibus-standard, which means a direct connection from a standard Profibus cable is possible. As the fibre is completely insensitive to external interference it is the perfect solution for applications in environments exposed to high levels of interference, or when reliable communications are required. The device supports data rates of up to 1.5 Mbit/s and transmission ranges up to 25 km (15.53 mi) using singlemode cable.


MD-63 PROFIBUS is intended for mounting on a 35 mm DIN-rail, where the modem is attached and locked in a single action.

Application

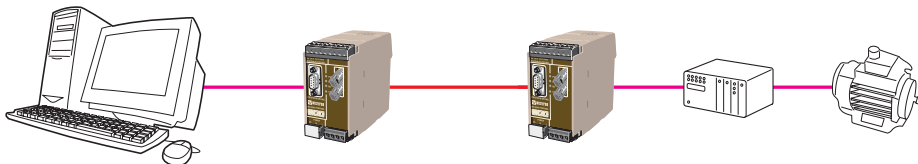

Also see application on page 42

Interface

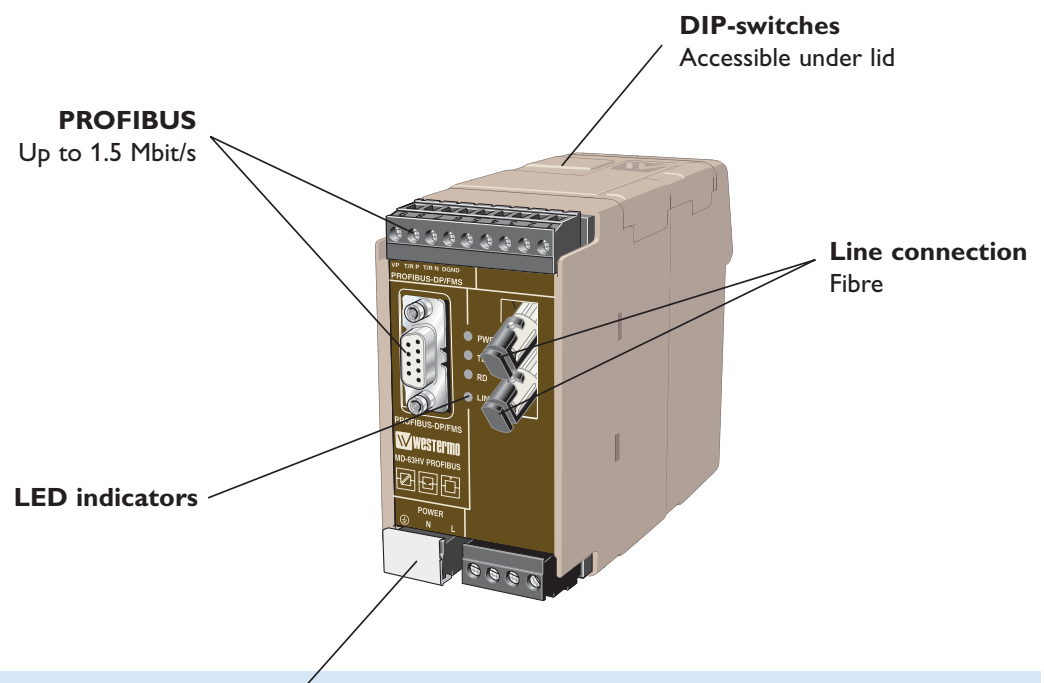

Power

	MD-63P HV	MD-63P LV
Operating voltage	99 – 264 VDC 85.5 – 264 VAC	10.8 – 60.5 VDC 10.8 – 49.5 VAC
Rated current	30 mA @ 95 VAC	250 mA @ 12 VDC
Rated frequency	DC / 48 – 62 Hz	DC / 48 – 62 Hz
Connection	Detachable 3-pos. screw terminal	Detachable 2-pos. screw terminal